




CERTIFIED
IEC
61730 Ed.1

CERTIFIED
IEC
61215 Ed.2



Anti-PID
System voltage durability
PPP 56042

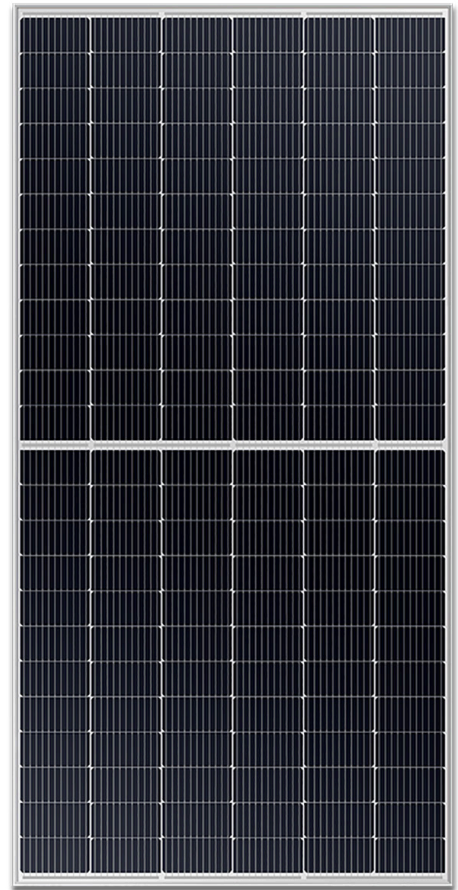

DATOS MECÁNICOS MECHANICAL SPECIFICATIONS

Dimensiones | Dimensions: 2279*1134mm

Max. Voltaje | Max. system Voltage (V): 1000/1500

Peso | Weight: 27.4 kg

No máximo. de series | Max. Series Fuse Rating (A): 25

Cable: 4 mm²

Carga mecánica | Mechanical load: 2400 / 5400Pa

Celdas | Cells : 182*91 Mono 44(6*24)


Hot Spot Rate: 100% Free


No de diodos | No of diodes: 3


Temp. funcionamiento | Operating temperature: -40-+85

Caja de conexiones | Junction box: IP68


GARANTÍA DE RENDIMIENTO LINEAL LINEAR PERFORMANCE WARRANTY

 Garantía de rendimiento lineal
Lineal performance warranty

 Garantía de rendimiento estandar
Standard performance warranty

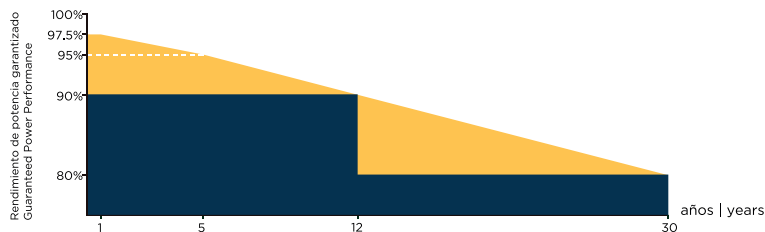

EX530-550M(B)-144(HC) 9BB(182)

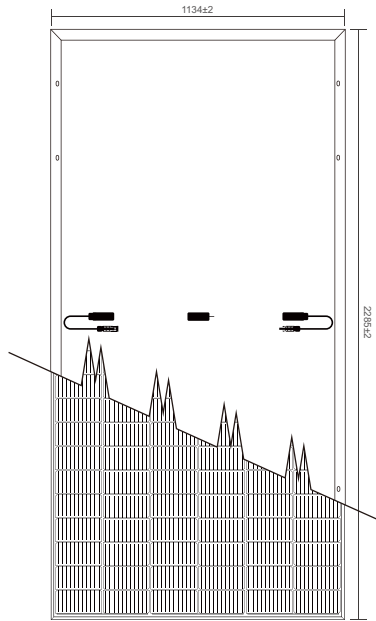

TIPO TYPE	EX530MB-144	EX535MB-144	EX540MB-144	EX545MB-144	EX550MB-144
STC 1000 W/M2. Module Temperature 25°C A.M.1.5					
Potencia de salida Power output	530	535	540	545	550
Max. potencia tolerada Max. power tolerance (%)	(0-+5)				
Eficiencia módulo Module efficiency (%)	20.5	20.7	20.9	21.1	21.3
Voltage Máximo voltage, VMP (V)	41.03	41.28	41.54	41.76	41.95
Intensidad máxima actual Current, IMP (A)	12.92	12.97	13.00	13.06	13.12
Voltaje circ. abierto Voltage open circuit, VOC (V)	48.83	49.12	49.43	49.70	49.97
Intensidad de cortocircuito Short circuit current, ISC (A)	13.74	13.79	13.83	13.88	13.93
NOCT 800W/M2 Environment. Temperature 20°C A.M. 1.5					
Potencia de salida Power output	400.3	404.0	407.8	411.6	415.4
Voltage Máximo voltage, VMP (V)	38.72	38.94	39.21	39.39	39.57
Intensidad máxima actual Current, IMP (A)	10.34	10.38	10.40	10.45	10.50
Voltaje circ. abierto Voltage open circuit, VOC (V)	46.10	46.37	46.67	46.92	47.17
Intensidad de cortocircuito Short circuit current, ISC (A)	11.06	11.10	11.13	11.18	11.22
COEFICIENTES DE TEMPERATURA TEMPERATURE COEFFICIENTS					
Coeficiente de temp. Temp. Coefficient (P _{MAX})	-0.35%/°C				
Coeficiente de temp. Temp. Coefficient (ISC)	0.04%/°C				
Coeficiente de temp. Temp. Coefficient (VOC)	-0.29%/°C				
NOCT	43±2°C				
I-V CURVAS CURVES					

Temperatura celdas | Cells temperature: 25°C. Current-Voltage & power Voltage Curve (550)

