

TECHNICAL INFORMATIONS

LEO SOLAR


12W 6000K PRETO

Luminária solar de fácil instalação, ideal para exterior.

Easy installation solar lamp, ideal for outdoor.

Lámpara solar de fácil instalación, ideal para exteriores.

ILAR-00268

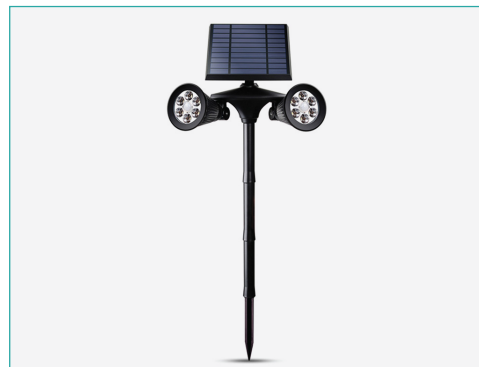

| REFERENCE | | DIMENSION & WEIGHT | | PHOTOMETRICAL DATA | |
|------------------|---|--------------------|---------|-----------------------------------|--------|
| Reference | ILAR-00268 | Lenght | 76.45cm | Total Luminous Flux - Presence | 800lm |
| Base | SMD 2835 | Width | 17.52cm | Total Luminous Flux - No Presence | 10lm |
| Body Material | ABS & PC | Height | 14.73cm | Beam Angle | 120°x2 |
| Housing Colour | Black | Packaging Unit | 1 | Detection Angle/Area | 120°x2 |
| Surface/Recessed | Recessed | Gross Weight | - | Sensing Range | ≤6m |
| Solar Panel | Polycrystalline 5V 3.5W 18% efficiency | Volume | - | Colour Temperature | 6000K |
| Nominal Lifetime | 35.000H | | | Colour Rendering Index | - |
| | | | | Humidity | - |

| ELECTRICAL AND OPERATING DATA | | ENERGY LABEL & STANDARS | | CERTIFICATIONS | |
|-------------------------------|-------------------------------|---------------------------------------|------|----------------------------|---------|
| Nominal Wattage | 12W | Energy Label | A++ | 2014/30/EU (EMC Directive) | - |
| Charging Time | 4-5 Hrs under direct sunlight | Energy Consumption KWH/1000H | - | CE | YES |
| Working Time | 8-12 hours | Type of Protection | IP65 | ROHS | YES |
| Operating Temperature | -20 ~ 55°C | Protection Class | - | ENEC | - |
| Storage Temperature | -40 ~ 85°C | Protecion Class IK (shock resistance) | - | Warranty | 2 YEARS |
| Battery | Lithium 3.7v 4500mAh | | | | |

SIZE



ROTATION

